



HÖCKER F-SERIES Structures

A-Frame Design

SPECIFICATIONS

F20-300-202

Span width:

20.00m

Eave Height:

3.00m

Ridge height:

6.40m

Peak height:

N/A

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

3 Gable upright (per end)

Longest component (m):

10.70m

Minimum length:

20.00m

Maximum length:

Unlimited in 5.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

102 km/h (0.50kN/m²)

Main profile size:

202/122/4mm(4-channel)

Eave connection type:

Sliding connection

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

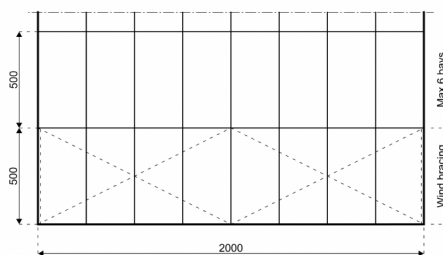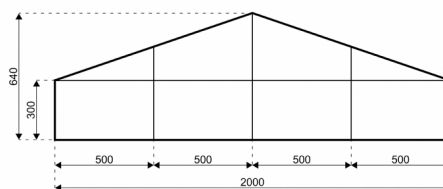

ACCESSORIES AVAILABLE

- ▶ External / Internal Entrance Ramp
- ▶ Overhead Door Canopy

- ▶ Internal Decorative Linings
- ▶ Door Transportation Storage Rack

- ▶ Single Entrance/Exit Door
- ▶ Glass / ISO Walling Transportation Storage Rack

- ▶ ABS Transportation Storage Rack
- ▶ Double Entrance/Exit Door

- ▶ Frame Transportation Storage Rack
- ▶ Bar Tensioned Roof

- ▶ Cover Transportation Storage Rack
- ▶ More accessories are available...



HEAD OFFICE AND PRODUCTION
 Röder HTS Höcker GmbH
 Hinter der Schlagmühle 1
 Kefenrod, D-63699
 Germany

Telephone: +49 (0) 60 49 95 100
 Fax: +49 (0) 60 49 95 1020
 Email: sales@roderhts.com
 Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:
 Australia Austria Bulgaria
 Central America Croatia France Germany
 Greece Romania India Ireland Italy

Great Britain Middle East Netherlands North America Poland Russia

Scandinavia Singapore Slovenia South Africa South America Spain Switzerland